panel lights

ALT-LED™

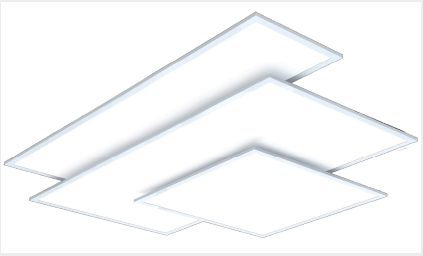

LED panel lights - Excellent light and easy installation.

125 lumens per watt and a selection of colour temperatures to suit your requirements. Thanks to a glare rating of UGR<19, they offer optimal basic lighting in the workplace-glare-free, easy on the eyes and motivating.

Available in square and rectangular, with an even arrangement in the ceiling, there are hardly any limits to the design options for rooms.

DIMENSIONS

300 x 600mm

ALT-P3060-ZXS-16W-3CCT

600 x 600mm



ALT-P6060-ZXS-40W-3CCT

300 x 1200mm



ALT-P30120-ZXS-40W-3CCT

600 x 1200mm



ALT-P60120-ZXS-60W-3CCT

APPLICATIONS

Suitable for Hotel, Meeting room, Office, Residence, School, Hospital Commercial lighting, etc.

ACCESSORIES

Surface mounting installation kit
Recessed installation kit.

FEATURES

CRI⩾90, UGR<19
Flicker-free driver
Colour temperatures switchable
Plug-in connection terminal for through-wiring for quick installation





POWER

Model No.	High efficiency	Wattage	CCT	Net Weigh	Product Size (mm)
ALT-ZT-P3060-ZXS-12W-3CCT	125lm/W	12W	4K/5K/6K	1.0Kg	595*295*37
ALT-ZT-P3060-ZXS-16W-3CCT		16W			
ALT-ZT-P6060-ZXS-24W-3CCT	125lm/W	24W	4K/5K/6K	1.6Kg	595*595*37
ALT-ZT-P6060-ZXS-40W-3CCT		40W			
ALT-ZT-P30120-ZXS-24W-3CCT	125lm/W	24W	4K/5K/6K	1.75Kg	1195*295*37
ALT-ZT-P30120-ZXS-40W-3CCT		40W			
ALT-ZT-P60120-ZXS-50W-3CCT	125lm/W	50W	4K/5K/6K	3.64Kg	1195*595*37
ALT-ZT-P60120-ZXS-60W-3CCT		60W			

SPECIFICATIONS

System efficiency:	125lm/w
UGR:	<19
Body Colour:	White
IP Rating:	IP20
Beam Angle:	90°
CRI:	⩾90
SDCM:	<3
Driver:	Lifud / BOKE Driver (Flicker free)
Power Lead:	1.2m Rubber Flex & Plug
Input:	220-240VAC, 50/60Hz
Power Factor:	＞0.9
Protection:	Overload /Short Circuit
Lifespan:	＞50,000hrs @Ta25°C(L70)
Operating Ambient Temperature:	-20 to +40°C
Dimming:	Non-Dimmable Dali Dimming optional
Installation:	Recessed/Suspended/Surface

Email: sales@ledsolar.co.nz Web: www.ledsolar.co.nz