



5  
years  
warranty

150  
Lm/W



## Buffalo 3

LED Flood Light




## Features

- LED Driver: SOSEN
- High efficiency: 150Lm/W
- Chips: SMD2835
- Working Temperature: -20 ~ +45°C
- Input Voltage: 200-240Vac, 50/60Hz, PF $\geq$ 0.90
- Multi-Beamangles: 30°, 60°, 90°, 120°, 30°\*90°, 50°\*120°, 60°\*100°, T2M, T3M, T4M, T5S
- Material: ADC12
- CCT: 2700-6500K
- IP Rating: IP66
- IK Rating: IK08
- CRI: Ra $>$ 70
- Warranty: 5 Years




Professional optical PC lens,  
non-yellowing material

## Product Size (Unit:mm)

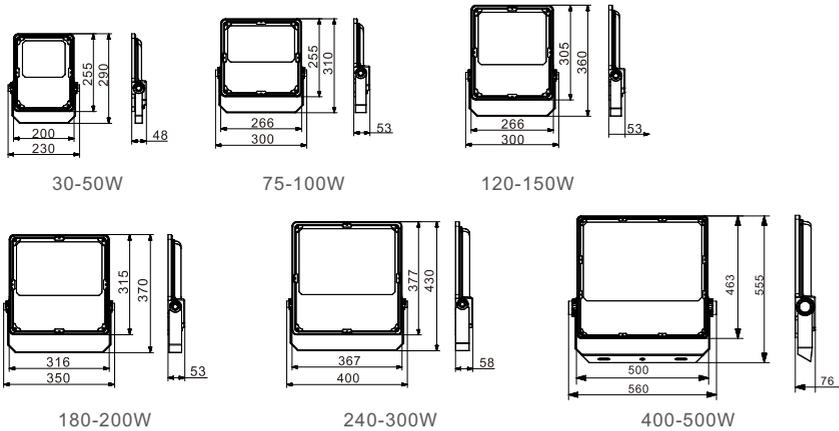

## Installation

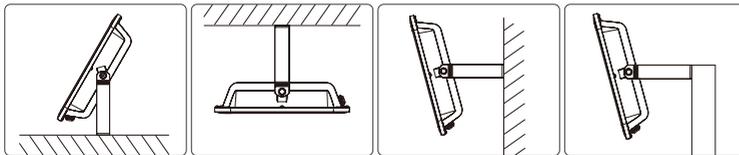

Floor Mounted

Top Mounted

Wall Mounted

Pole Mounted



ADC12



Adjustable bracket



CCT and power  
selectable Option 2



## 150lm/W 16 in 1 Lens LED Floodlight

Model No.	Power (W)	LED Type	Beam angle	Input Voltage	Driver Brand	CRI	CCT	Product Dimension(mm)	Qty Carton	Carton size (mm)	G.W.(KG)
BA3-3030W	30	Lumileds 2835SMD	30° 60° 90° 120° 30 x 90° 50 x 120° 60 x 100° T2M T3M T4M T5S	AC200-240V, 50/60Hz	SOSEN	70	2700-6500K (Optional)	290 x 230 x 48	15	480 x 415 x 196	30
BA3-3050W	50							290 x 230 x 48	15	480 x 415 x 196	30
BA3-3075W	75							310 x 300 x 53	10	610 x 320 x 335	29
BA3-3100W	100							310 x 300 x 53	10	610 x 320 x 335	29
BA3-3120W	120							360 x 300 x 53	5	315 x 315 x 385	16.5
BA3-3150W	150							360 x 300 x 53	5	315 x 315 x 385	16.5
BA3-3180W	180							350 x 370 x 53	5	370 x 315 x 395	22
BA3-3200W	200							350 x 370 x 53	5	370 x 315 x 395	22
BA3-3240W	240							400 x 430 x 58	5	420 x 340 x 455	30
BA3-3300W	300							400 x 430 x 58	5	420 x 340 x 455	30
BA3-3400W	400							560 x 555 x 76	1	605 x 580 x 130	13
BA3-3500W	500							560 x 555 x 76	1	605 x 580 x 130	13

### Light Distribution Optional

